

Ikelite

Flex Arm for Substrobe DS51

Installation Instructions

Flex Arm System

The Flex Arm utilizes "pop-bead" components which provide the necessary holding power yet effortless repositioning. On land, the Flex Arm may not support the full weight of the Substrobe DS51. Over time the pop-beads will loosen slightly and may not hold the strobe in position on the surface. This is normal and will not adversely affect the arm's holding power while underwater.


Additional pop-beads are available for purchase in four-piece lengths (Ikelite Product #9350.44).

Installation Instructions (Illustration on reverse side):

1. Determine the desired length of arm and add or subtract "pop-bead" components from the Flex Arm as necessary.
2. If not already attached, push the Flex Arm onto the Stem Ball as shown.
3. Push the DS51 Strobe Mount with pop-bead onto the other end of the Flex Arm. Firm pressure is necessary to attach the components.
4. Adjust strobe position as needed while underwater.
5. Whenever disassembling the unit, leave one pop-bead attached to each the DS51 Strobe Mount and the Stem Ball.

CAUTION: Do not carry your system by the Flex Arm. The Flex Arm is not designed to be used as a carrying handle.

Illustration

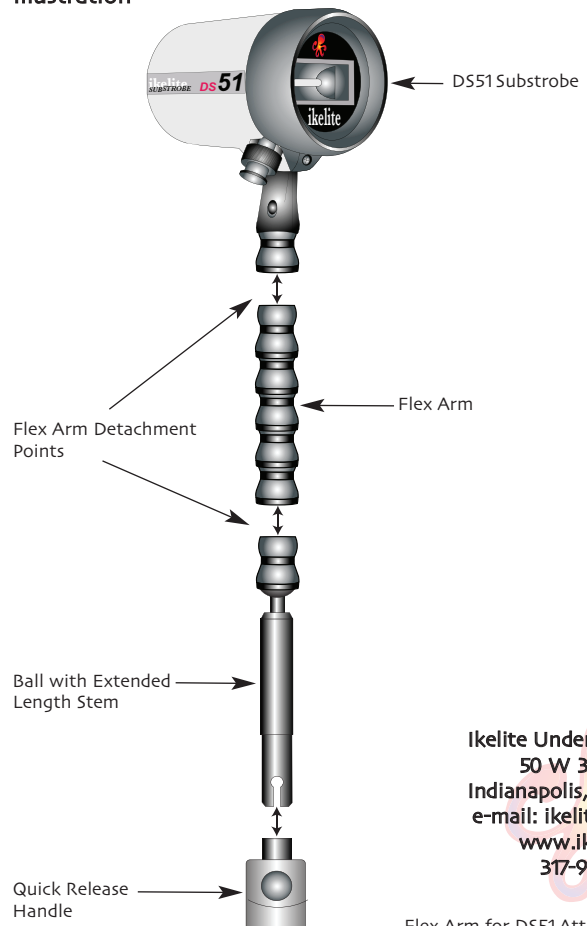

Ikelite Underwater Systems
50 W 33rd Street
Indianapolis, IN 46208 USA
e-mail: ikelite@ikelite.com
www.ikelite.com
317-923-4523

Flex Arm for DS51 Attachment_01-0809